





DATA SHEET

RUBBER SHIMS

LH3 - LGH1 - LGH2 - LGH3

LGH

LGH1= Ø 110 / Thickness 1mm
 LGH2= Ø 110 / Thickness 2mm
 LGH3= Ø 110 / Thickness 3mm

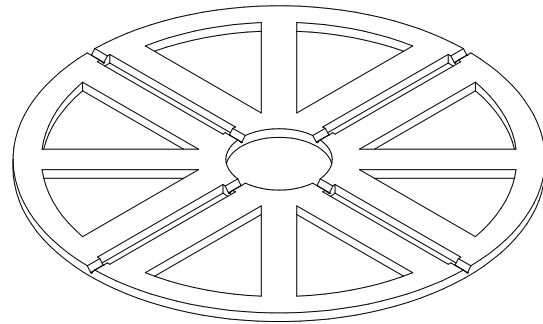LH3

LH3= Ø 150 / Thickness 3mm

TECHNICAL SPECIFICATION

Supply and installation of special TPE rubber levelers for Eternoivica supports.

The levelers can compensate from 1 to 3 mm in thickness and can be positioned on the heads of the SE, NM, SB, ST and EH supports. Made of rubber with anti-slip and antinoise effect, they differ in LGH 1, 2 and 3 mm with diameter 110 mm and LH3 3mm thick with a diameter of 150 mm.

CHARACTERISTICS:

Compensation from 1-2-3mm
 Anti-slip
 Anti-noise

RAW MATERIAL:

TPE

ENVIRONMENTAL IMPACT:

recyclable material - not dangerous

APPLICATION:

with any Eternoivica support

GENERAL CHARACTERISTICS & PROPERTIES

	UNIT	VALUE	TOLERANCE +/-
Rubber Shim LH3 DIAMETER	mm	150	+/- 0.5
Rubber Shim LH3 HEIGHT	mm	3	+/- 0.1
Rubber Shim LGH1 DIAMETER	mm	110	+/- 0.5
Rubber Shim LGH1 HEIGHT	mm	1	+/- 0.1
Rubber Shim LGH2 DIAMETER	mm	110	+/- 0.5
Rubber Shim LGH2 HEIGHT	mm	2	+/- 0.1
Rubber Shim LGH3 DIAMETER	mm	110	+/- 0.5
Rubber Shim LGH3 HEIGHT	mm	3	+/- 0.1

ITEMS CHARACTERISTICS & PROPERTIES

COD.	DESCRIPTION	MEASURE	PCS. PER BOX
E081003000	Rubber Shim LH3	Ø150mm X 3mm	250
E082001000	Rubber Shim LHG1	Ø110mm X 1mm	800
E082002000	Rubber Shim LHG2	Ø110mm X 2mm	600
E082003000	Rubber Shim LHG3	Ø110mm X 3mm	500

The packaging of the supports consists of cardboard boxes. The final packaging of the pallets is made with the wrapping of a polyethylene film. Indoor storage, protected from precipitation, is recommended.

INSTALLATION METHOD: The product is laid dry, without the need for adhesives or other types of fixings.

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.