


DATA SHEET HEAD LOCKING SYSTEM

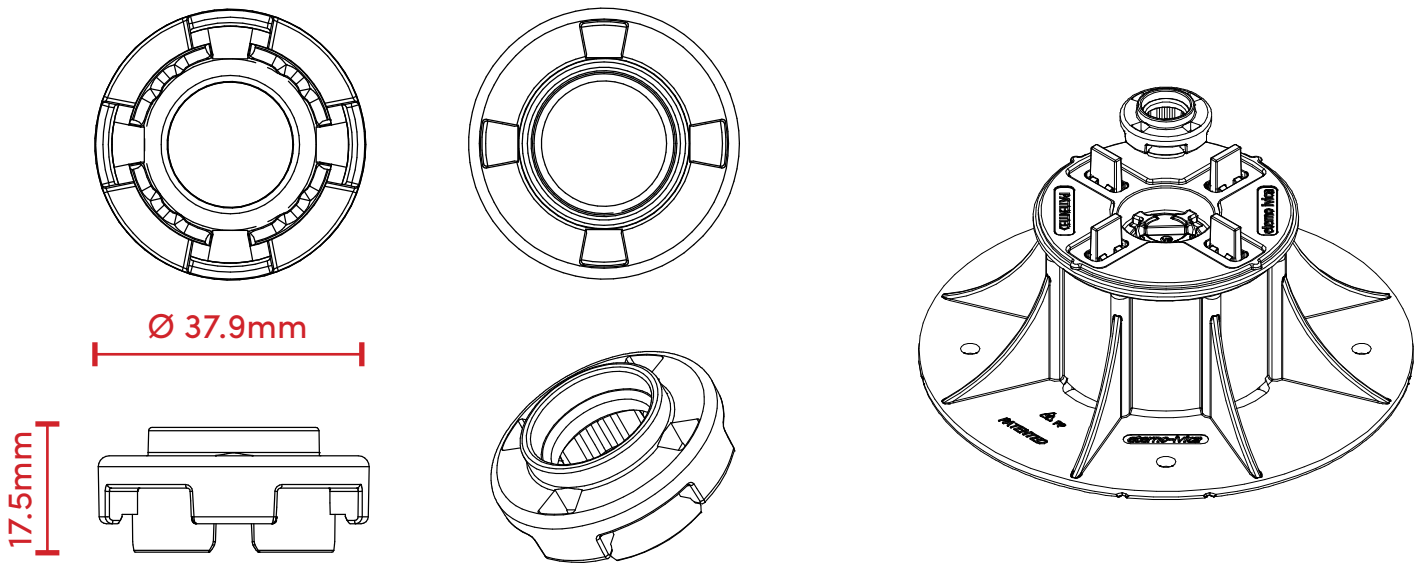

TECHNICAL SPECIFICATION

The head lock allows you to lock the tilting of the SE heads on the Pedestal supports.
At the same time the head lock does not compromise the rotation of the SE heads on the Pedestal supports.
Suitable for both the SE Standard Head (Ø 110mm) and the SE XL Head (Ø150mm).

RAW MATERIAL:

Polypropylene

ENVIRONMENTAL IMPACT:

recyclable material - not dangerous

ADVANTAGES:

Lock the Tilt for SE heads

FIELD OF USE (ASSOCIATED SUPPORT):

Accessory for SE Standard and XL heads

GENERAL CHARACTERISTICS & PROPERTIES

<i>Cod:E0360001000</i>	UNIT	VALUE	TOLERANCE +/-
DIMENSION	mm	17.5x37.9	+/- 0.1
WEIGHT	Kg	0.01	+/- 0.001
SHORE	Shore d	70	+/- 3
FIRE REACTION*	UNI-EN 13501-1:2009	CLASSE "E"	
LOW T(°C) REACTION	°C	-40	

*Tests made by Giordano S.p.A. Institute of Bellaria-Igea Marina (RN)-Italy

PACKAGING: The Head Locking System are sold in boxes of N° 100pcs.

INSTALLATION METHOD: The product is laid dry, without the need for adhesives or other types of fixings.

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.