

emotion meets architecture

FLIESENNEUHEITEN
NEW TILE COLLECTION

2016



48

OUTSTANDING

Modularität oder die Freiheit, Formate stimmig zu kombinieren.

— **OUTSTANDING** Modularity or the freedom to harmoniously combine different formats.



Schon in der Antike verstand man es durch verschiedene farbige Zuschlagstoffe betonartige Böden zu verschönern. Diese teils gut erhaltenen alten Terrazzoböden beeindrucken noch heute. Fortschrittliche Technologien ermöglichen es in unserer Zeit, die ästhetischen Vorteile verschiedener Materialien technisch hochwertig zu extrem widerstandsfähigen funktionalen Produkten zu verknüpfen. OUTSTANDING ist – als Mischung aus Stein- und Betonanmutungen – eine Serie mit überzeugend natürlichem Charakter für die moderne Architektur.

Mit ihrer modularen Formatvielfalt in vier harmonischen Farben und der hohen Trittsicherheitsklasse R10 wird sie in vielen öffentlichen Gebäuden wie Schulen, Verwaltungen, Sport- und Wellnessanlagen an die Schönheit alter Terrazzoböden erinnern. Private Wohnbereiche nicht ausgenommen, denn auch hier überzeugt OUTSTANDING mit urbarer Freizügigkeit.

Produktübersicht Seite 72.

— Even in ancient times, different coloured additives were used to enhance concrete-like floors. Some of these old terrazzo floors are well preserved and continue to impress us today. In the present day, progressive technologies are used to combine the aesthetic advantages of different materials in a technically sophisticated way in order to create extremely durable, functional products. As a mix of stone and concrete effects, OUTSTANDING is a range with an impressively natural character for modern architecture.

With its modular variety of forms in four harmonious colours and high R10 slip resistance, when installed in public buildings, such as schools, administrative buildings, and sports and wellness facilities, it is reminiscent of the beauty of old terrazzo floors. However, OUTSTANDING can also be installed in residential buildings, where it is impressively in keeping with an urban, liberal lifestyle.

Overview of products on page 72.



OUTSTANDING

Grundfliesen aus Feinsteinzeug (für Wand und Boden geeignet)
Porcelain stoneware basic tiles (suitable for walls and floors)

vilbostone
plus

vilbostone
Feinsteinzeug • Porcelain stoneware

Art. 2735 – 60 x 120 cm

GRAU
GREY



ANTHRAZIT
ANTHRACITE



CREME
CREME



GRAUBRAUN
GREY-BROWN



TZ60

R10

2

TZ90

R10

2

TZ10

R10

2

TZ80

R10

2


Art. 2732 – 30 x 120 cm

Art. 2668 – 60 x 60 cm


Art. 2324 – 30 x 60 cm

Art. 2622 – 15 x 60 cm

Art. 2617 – 7,5 x 60 cm

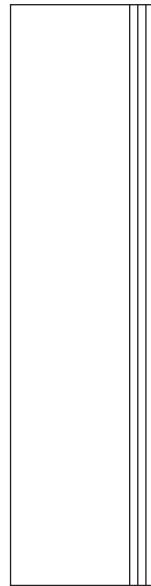


TREPPENAUFTRITT
STAIR TREAD




TZ60 · TZ90 · TZ10 · TZ80
 R10

Art. 2650 – 30 x 50 cm



TZ60 · TZ90 · TZ10 · TZ80
 R10



TZ60 · TZ90 · TZ10 · TZ80
 R10



TZ60 · TZ90 · TZ10 · TZ80
 R10




TZ60 · TZ90 · TZ10 · TZ80
 R10



MULTICOLOR – MULTICOLOUR

TZ99
 R10




Art. 2625 – 7,5 x 7,5 cm


TZ60 · TZ90 · TZ10 · TZ80
 R10 B

OUTSTANDING

Variationsvielfalt
Shade variation

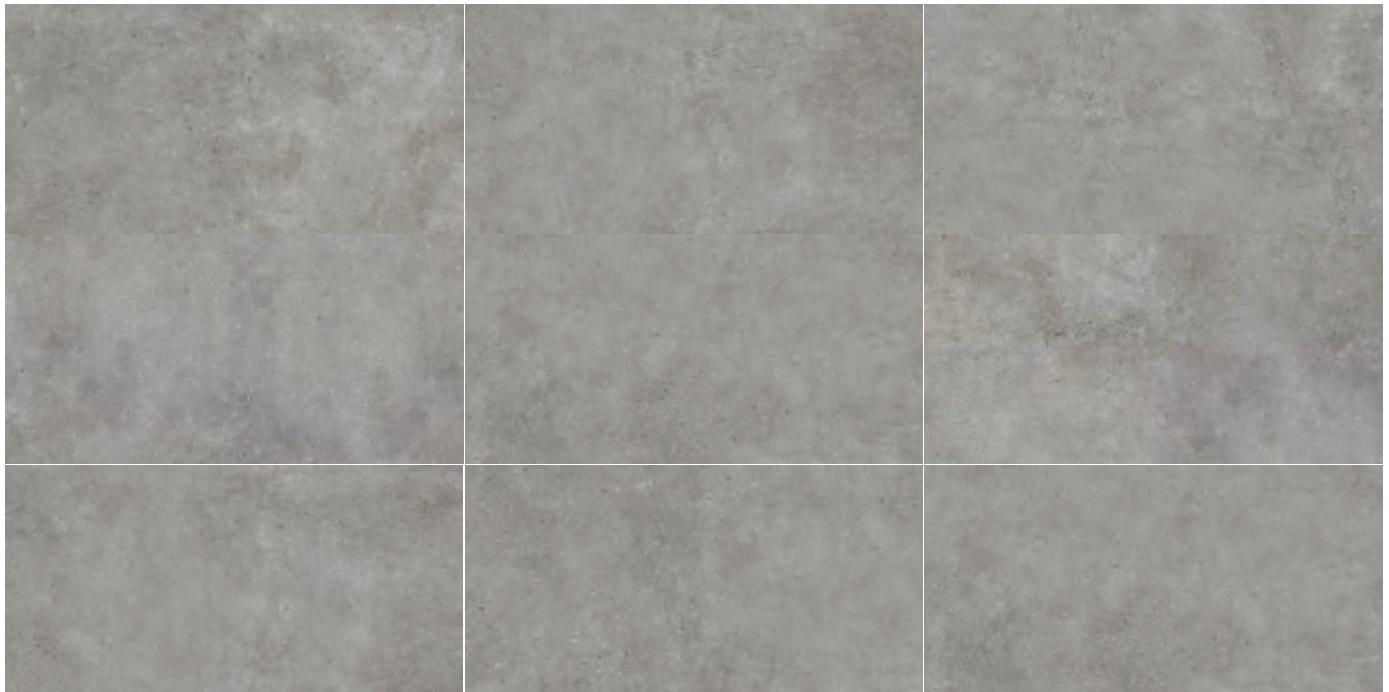

60 x 120 cm | GRAU — GREY

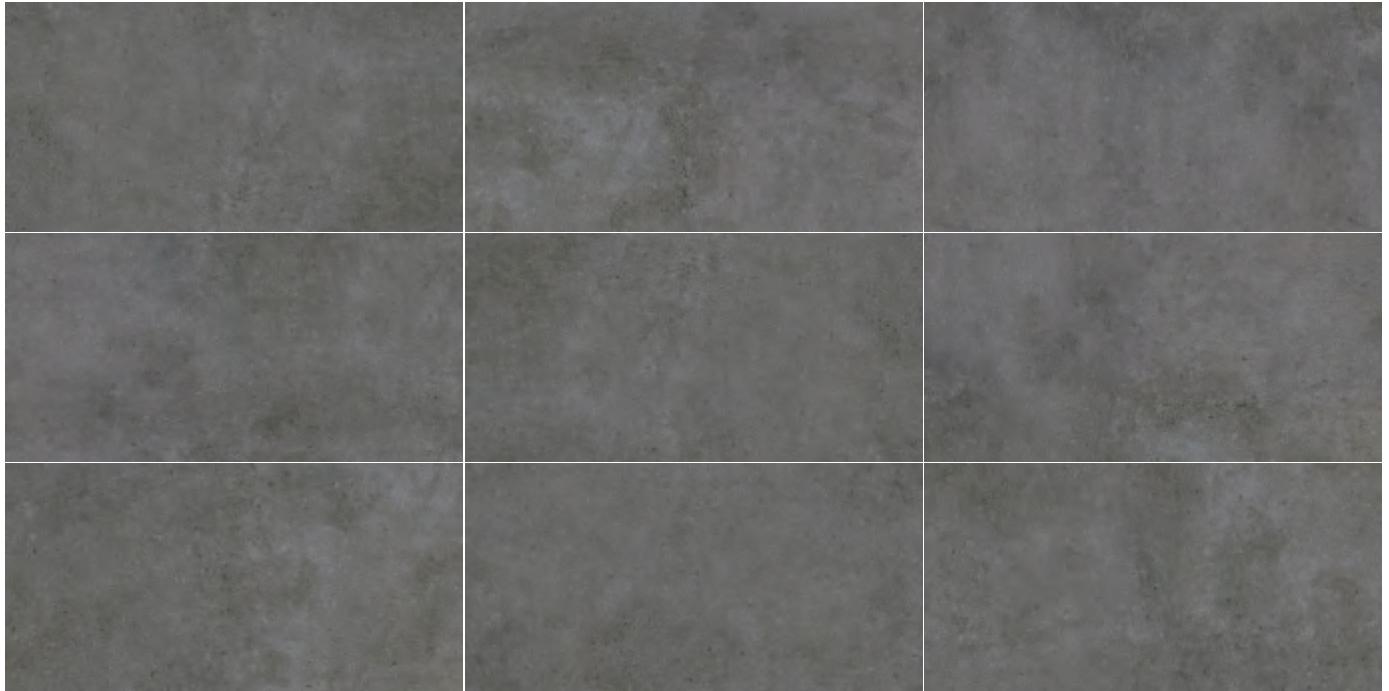


60 x 120 cm | ANTHRASIT — ANTHRACITE

OUTSTANDING

Variationsvielfalt
Shade variation



60 x 120 cm | CREME – CREME

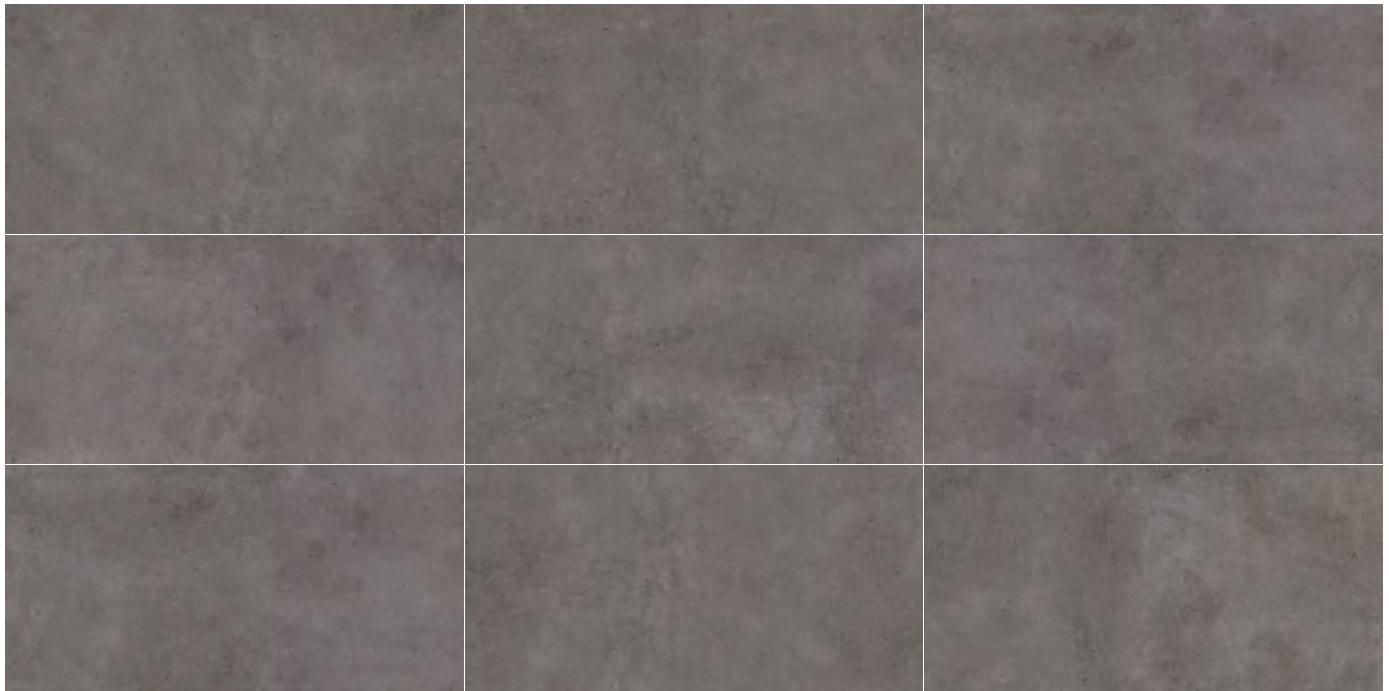

74

60 x 120 cm | GRAUBRAUN – GREY-BROWN

Zeichenschlüssel

1 2 3 4 5 Abriebgruppe DIN EN ISO 10545-7)

Die Abriebgruppe beschreibt die Verschleißeigenschaft von Fliesen aus glasiertem Steinzeug. Es werden 5 Abriebgruppen unterschieden: von 1 (sehr leichte Beanspruchung) bis 5 (starke Beanspruchung)

 Rutschhemmung im gewerblichen Bereich

 Rutschhemmung im Barfußbereich

 Frostbeständig nach DIN EN ISO 10545-12

 Rektifiziert

 Handbemalt, Craquelébildung möglich
(feine Haarrisse in der Glasur)

 Fliesenstärke 20 mm

 **ceramicplus**

 Passende Bodenfliesen

 **vilbostoneplus** Oberflächenversiegelung

 1  2  3  4 Variationsvielfalt

Signs and symbols

1 2 3 4 5 Wear-resistance group (DIN EN ISO 10545-7)

The wear-resistance group defines the wearing properties of tiles in glazed vitreous. A distinction is made between 5 wear-resistance groups, from 1 (suitable for minimal stress) to 5 (suitable for high levels)

 Anti-slip in workshop areas

 Anti-slip in barefoot areas

 Frostproof in acc. with DIN EN ISO 10545-12

 Rectified

 Handpainted,
hairline cracks in the glaze may develop

 Tile thickness 20 mm

 **ceramicplus**

 Recommended floor tiles

 **vilbostoneplus** Surface seal

 1  2  3  4 Shade variation

02/2016 Farb- und Dimensionsabweichungen entsprechen den üblichen Toleranzen. Sortiments-, Modell- und Farbausleihungen vorbehalten.
Shades and dimensions subject to the usual tolerances. We reserve the right to make technical modifications to the range and alter colours.

Villeroy & Boch
Autensteiner Weg
D-65663 Merzig
info@vb-fliesen.com

WWW.VILLEROY-BOCH.COM